

ELECTRIC PULLER

STARKE
LIFTMAXX

AC POWERED ELECTRIC WALKIE
2200 LB

AC

FEATURES

Capacity

- 2200 lbs

Standard Equipment

- Lithium battery 24V/30AH
- 24V/10A CSA approved smart charger.
- Rubber-Pneumatic 9.8x3.1 inch drive wheels.
- Tandem stability caster wheels.

Features

- Ergonomic control head with three height adjustments.
- Wrap around hand gaurd.
- Dual butterfly travel controls with forward and reverse travel control.
- Reversing switch, key switch, battery discharge indicator and horn.
- Ruyi Handle with keypad.

The walkie type **ELECTRIC PULLER** is for the energy saving towing of trailers carrying up to 2200 lbs. This tractor can be equipped with different wire trolley and hand truck for towing small and heavy parts.

Application:

Widely used indoor and outside like workshops and airport.

TT2200LX



24V/30AH Lithium Battery





RUYI Handle with PIN Code



Rubber Wheel

DIMENSION DRAWING:

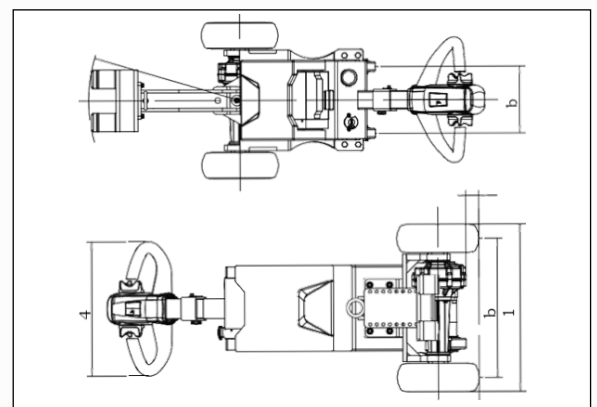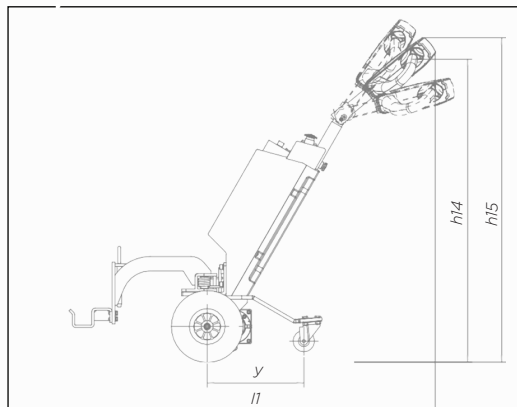

ELECTRIC PULLER



AC POWERED ELECTRIC WALKIE
2200 LB

AC

TT2200LX

Model	-	TT2200LX
Drive type		Electric
Operator type		Pedestrian
Rated capacity	Q(lbs)	2200
Rated traction	N	200
Wheelbase	y(in)	13.3
Service weight (with battery)	lbs	165.3
Axle loading, laden front/rear	lbs	165.3/0
Axle loading, unladen front/rear	lbs	110.2/55.1
Tires: solid rubber, superelastic, pneumatic, polyurethane		Rubber (pneumatic)
Tire size, front	in	9.8x3.1
Tire size, rear	in	2.9x1.2
Wheels, number front/rear (x=driven wheels)	mm	2x/x
Tread, front	b10(in)	16.8
Tread, rear	b11(in)	8.5
Overall height	h15(in)	38.9-44-47.2
Height drawbar in driving position min./max.	h14(in)	37-41.3-43.7
Coupling height	h10(in)	-
Overall length	l1(in)	47.6-50.3-52.9
Overall width	b1/b2(in)	20.4
Ground clearance, center of wheelbase	m2(in)	1.3
Travel speed, laden/unladen	Km/h	405/5
Drawbar pull, laden/unladen	N	200
Max. drawbar pull, laden/unladen	N	600
Max. gradeability, laden/unladen	%	16-Mar
Service brake		EM brake
Drive motor rating S2 60 min	kw	0.4
Battery voltage/nominal capacity K5	V/Ah	Lithium 24/30
Battery weight	kg	19.8
Type to drive unit		DCBL
Type of steering		Mechanical
Noise level at operator's ear, according to DIN12053	dB(A)	68

Meets or exceeds ANSI B56.1 Standards. Specifications, features, and images are provided for reference only and may be subject to change without prior notice.

Rev 05/2017

